


# SPECIFICATION SHEET


## 3 Compartment Floor Box Plates




**STO283**  
Blank Plate

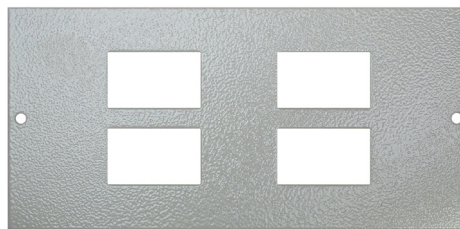

**STO284**  
4 Way Data Plate  
4 x 37x22mm LJ6C Module Cutouts

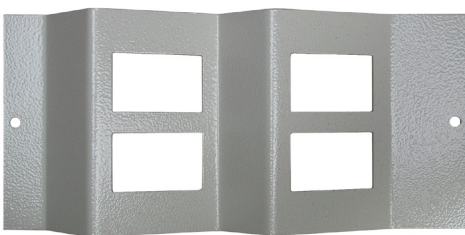

**STO284/W**  
4 Way Wave Data Plate  
4 x 37x22mm LJ6C Module Cutouts

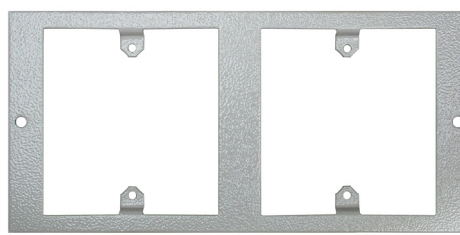

**STO286** [1]  
2 x Single Accessory Plate  
(Accepts Standard Accessory Plates)




**STO286/IFM** [1] [5]  
Flush Single Accessory Plate  
(Accepts Standard Accessory Plates)



**STO287** [1]  
Standard Twin Accessory Plate  
(Accepts Standard Accessory Plates)



**STO287/FM** [1] [5]  
Flush Standard Twin Accessory Plate  
(Accepts Standard Accessory Plates)

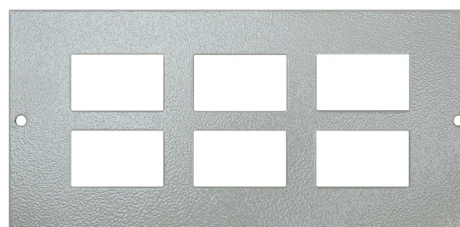

**STO289**  
6 Way Data Plate  
6 x 37x22mm LJ6C Module Cutouts

### Product Information

**Product Type**

Cavity & Screed Floor Box Plates

**Suitable For:**

TFB1, TFB3, TSB1, TSB2, TSB3, SB003, SB004

**Plate Dimensions**

185mm x 89mm

**Material**

Galvanised Steel

**Finish**

Leatherette texture Powder Coating

**Colour**

Equivalent to RAL7035 / Light Grey

**Note [1]:**

the STO286 & STO287 range of accessory plates are not suitable for floorboxes below 80mm depth due to plug top and wiring clearance.

**Note [2]:**

Side wired twin switched socket plate (STO291/SW) designed specifically for use with TFB/64 floorbox .

**Note [3]:**

STO294 is supplied fitted with 2 x 50x50mm Euro collars (see below), to be used in conjunction with listed Socket modules.



EURO COLLAR

**Note [4]:**

RCD & USB sockets only suitable for floorboxes of 80mm Depths or above.

**Note [5]:**

STO286/IFM & STO287/FM Stepped down 10mm.

# SPECIFICATION SHEET

## 3 Compartment Floor Box Plates




**ST0291**  
Twin Switched Sockets



**ST0291/SW** <sup>[2]</sup>  
Twin Switched Sockets (side wired)



**ST0294** <sup>[3]</sup>  
2 x 50mm Euro Module Plate

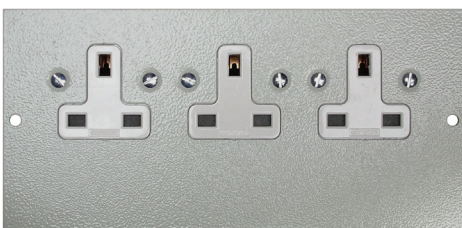

**ST0295**  
Triple Unswitched Sockets



**ST0291/USB** <sup>[4]</sup>  
Twin Switched Sockets with USB charging ports



**ST0291/RCD (TYPE A)** <sup>[4]</sup>  
Twin Switched RCD Protected Sockets



**ST0291/RCD/FM** <sup>[4]</sup>  
Moulded Plastic Twin switched RCD Protected Sockets



**ST0291/RCD (TYPE B)** <sup>[4]</sup>  
Twin Switched RCD Protected Sockets

### Product Information

**Product Type**  
Cavity & Screed Floor Box Plates

**Suitable For:**  
TFB1, TFB3, TSB1, TSB2, TSB3, SB003, SB004

**Plate Dimensions**  
185mm x 89mm

**Material**  
Galvanised Steel

**Finish**  
Leatherette texture Powder Coating

**Colour**  
Equivalent to RAL7035 / Light Grey

**Note [1]:**  
the ST0286 & ST0287 range of accessory plates are not suitable for floorboxes below 80mm depth due to plug top and wiring clearance.

**Note [2]:**  
Side wired twin switched socket plate (ST0291/SW) designed specifically for use with TFB/64 floorbox .

**Note [3]:**  
ST0294 is supplied fitted with 2 x 50x50mm Euro collars (see below), to be used in conjunction with listed Socket modules.



EURO COLLAR

**Note [4]:**  
RCD & USB sockets only suitable for floorboxes of 80mm Depths or above.

**Note [5]:**  
ST0286/IFM & ST0287/FM Stepped down 10mm.



**MM010WH**

13A Standard Socket Module  
To be used in conjunction with ST0294



**MM038WH**

5A Socket Module  
To be used in conjunction with ST0294



**MM020WH**

16A Euro Socket Module  
To be used in conjunction with ST0294

## Product Information

### Product Type

Cavity & Screed Floor Box Plates

### Suitable For:

TFB1, TFB3, TSB1, TSB2, TSB3, SB003, SB004

### Plate Dimensions

185mm x 89mm

### Material

Galvanised Steel

### Finish

Leatherette texture Powder Coating

### Colour

Equivelant to RAL7035 / Light Grey

### Note [1]:

the ST0286 & ST0287 range of accessory plates are not suitable for floorboxes below 80mm depth due to plug top and wiring clearance.

### Note [2]:

Side wired twin switched socket plate (ST0291/SW) designed specifically for use with TFB/64 floorbox .

### Note [3]:

ST0294 is supplied fitted with 2 x 50x50mm Euro collars (see below), to be used in conjunction with listed Socket modules.



EURO COLLAR

### Note [4]:

RCD & USB sockets only suitable for floorboxes of 80mm Depths or above.

### Note [5]:

ST0286/IFM & ST0287/FM Stepped down 10mm.